

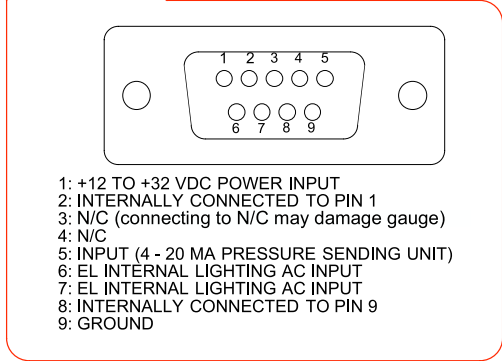
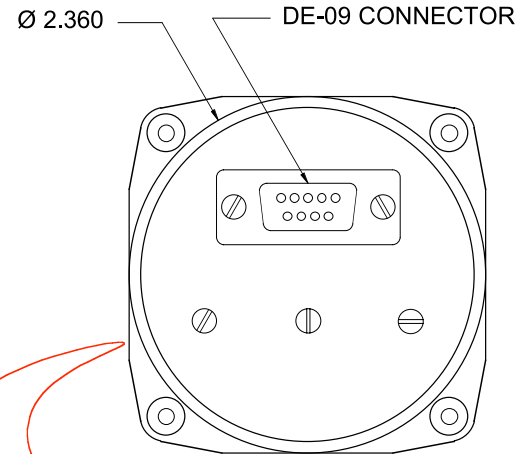
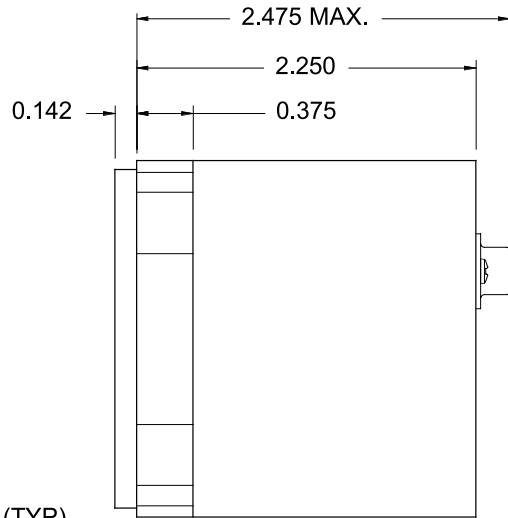
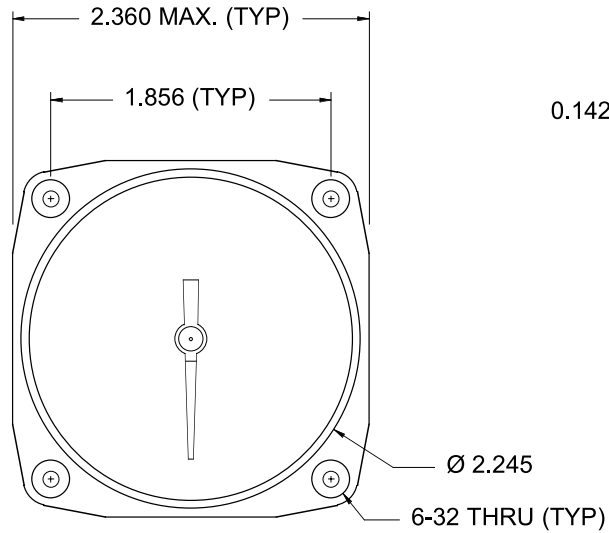


REVISION HISTORY				
REV	MO-DA-YR	NEO / ECO	APPROVED	NOTES
-	11-10-00	PLM.	PLM.	INITIAL DRAFT
A	11-24-00	PLM.	PLM.	CORRECTED HOLE SPACING & DIA.
B	10-06-11	PLM	PLM	SIMPLIFIED REAR-VIEW DETAIL
C	2024-11-27	2024-064	KQM	ADDED INSERT # & CORRECTED PIN 3 TO N/C

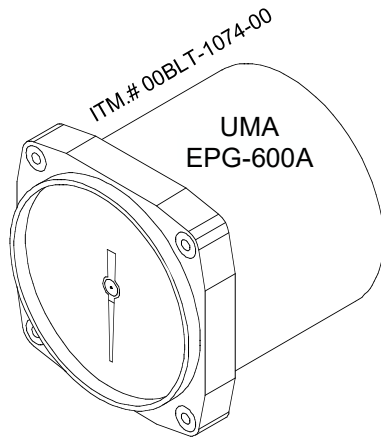

- 1: +12 TO +32 VDC POWER INPUT
- 2: INTERNALLY CONNECTED TO PIN 1
- 3: N/C (connecting to N/C may damage gauge)
- 4: N/C
- 5: INPUT (4 - 20 MA PRESSURE SENDING UNIT)
- 6: EL INTERNAL LIGHTING AC INPUT
- 7: EL INTERNAL LIGHTING AC INPUT
- 8: INTERNALLY CONNECTED TO PIN 9
- 9: GROUND

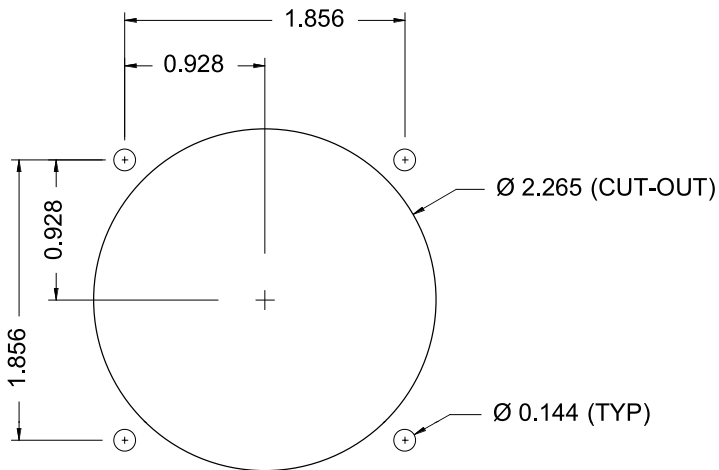


**MODEL EPG-600A**  
**ITM.# 00BLT-1074-00**

UNLESS OTHERWISE SPECIFIED DIMS ARE IN INCHES.  
 TOLERANCES ARE:

0.X	±0.015	ANGLES	FRACTIONS	63
0.XX	±0.010	± 0.5°	± 1/64	✓
0.XXX	±0.005			

INTERPRET GD&T PER ASME 14.5 FMT REV G

THIRD ANGLE PROJECTION



DO NOT SCALE DRAWING



MOUNTAIN HIGH  
 E&S CO.  
 REDMOND, OR. USA

[ KC ]  
 00

NUMBER OF KEY CHARACTERISTICS  
 IN THIS DRAWING / DOCUMENT  
 PER MH DOC: ESR-001

ORIG.:	PLM	11-10-00	OXYGEN E-GAUGE, 2.25" FORM-FACTOR (SCD)	
DRWN.:	PLM	11-10-00	DWG.# 0EPG6-051-002	REV C SIZE A
ENG.:	PLM	11-10-00	MOD.# EPG-600A	ITM.# 00BLT-1074-00
APPR.:	NAME	MO-DA-YR	SHEET 1 OF 1	CUSTOMER CODE